

LED Troffer Light Spec.



Features


1. Smooth and comfortable light, low glare.
2. Special arc-shaped structure design.
3. The PC lens will not be off from housing.
4. Reasonable arrangement of LEDs, better for heat dissipation.
5. Seamless and cambered design more architectural, dust-proof and insects-proof.
6. High quality isolated driver; High efficiency>87%, PF>0.9
7. Ultra-thin fixture, saving more shipping and storage cost.

Applications

Mainly used in commercial lighting place, such as office, factory and supermarket.

Model NO.	Voltage	Power	CCT	Power Factor	Efficacy	CRI	Lifespan	Certificate
MA-HTR201J-20/30/40W	AC120-277V	20/30/40W Tunable	3500K/4000K/5000K Tunable	>0.95	130lm/w	>80	50,000hrs	ETL/cETL; DLC Premium
MA-HTR202J-40/50/60W	AC120-277V	40/50/60W Tunable		>0.95	130lm/w	>80	50,000hrs	ETL/cETL; DLC Premium

Product Dimension

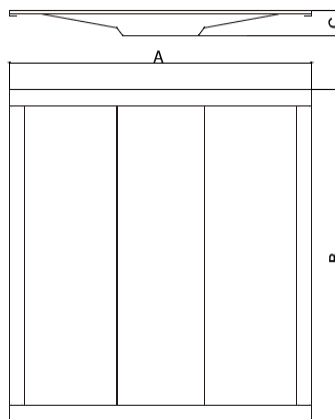

Maximum overall	A	B	C
2*2ft	603mm	603mm	45mm
2*4ft	603mm	1213mm	45mm

LED Troffer Light Spec.**Installation Manual**

Step 1: Make sure of all the power is off before installing. Remove the one ceiling tile that you need to install light fixture on. Then place the light fixture on the T-bar carefully and make sure it is correctly in place and secure.

Step 2: Lift the 4 buckles on the back of the panel up by 90° then bend the top part of the buckles 90° towards the direction where you can anchor the light fixture to the T-bar.

Step 3: Open the driver's junction box and connect the AC wire to the driver correctly (L=black & N=white)

Warning:

Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

